

MANUAL OVERRIDE KIT FOR DE PALA SERVOMOTOR M9 - R9

Je pool of Italian OEM Technology


OPERATING INSTRUCTIONS

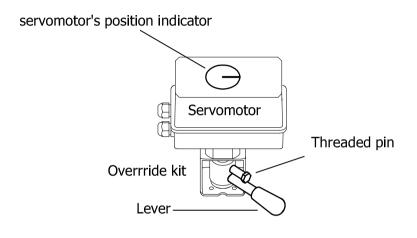

To drive the valve with the servomotor screw the threaded pin completely




To drive the valve manually unscrew the threaded pin completely




If the threaded pin is locked use 15 mm wrench or move the servomotor forward and backward, switch off the servomotor during manual operations.

WARNING: if the servomotor should be uncoupled (e.g. replacement) observe the following drawing to recouple it, in order to avoid possible damages.

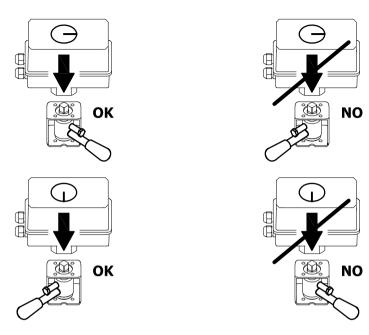

It's possible to assemble the servomotor to override kit spinning it 90° / 180° / 270° compared to the figures above; always pay attention to the related positions before connection.

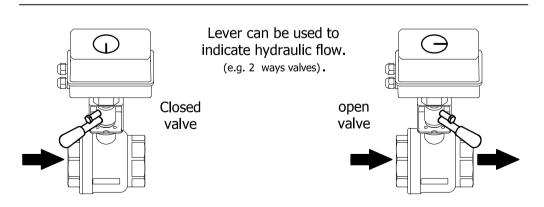



GUARANTEE. The Seller warrants each new service order to be from defects in material, vorkmanishy and construction, and that when halled and used in accordance with this behind distainted will plent offine a begindle specification be on a period of two years from the date of below-y. If examination by the Seller discloses that the product has been defective, them its obligation is limited to expeat or replicament, at its option, of the defective product or its components. The Seller is not responsible for products which have been subject for inside, alterior, accident for repairs not performed by the Seller reduction and the between the composition of the Seller inside in obligation is the CDP Seller's Excellent in the CDP Seller's Excellent in the Seller Seller